

P5T Series

- Compact guided cylinder for short stroke applications
- 9 Bore sizes, 16mm to 200mm
- Strokes 10 to 100mm depending on model
- Standard dowel holes on body and tool plate
- High load bearing option
- Internal bumpers and magnetic piston are standard
- Flexible porting: top, rear, side



Operating information

Operating pressure:	1 MPa (145 PSIG / 10 bar)
Temperature range:	
Nitrile seals (standard)	0°F to 165°F (-18°C to 74°C)
Fluorocarbon seals*	0°F to 250°F (-18°C to 121°C)
* See fluorocarbon seal option for high temperature applications.	
Filtration requirements:	40 micron, dry filtered air

Ordering information

P5T	-	J	032	D	H	S	N	R	100
------------	----------	----------	------------	----------	----------	----------	----------	----------	------------

Shaft / bearing type	
J	Composite bearing, chrome plated shaft (std)
H	Ball bearing, stainless steel shaft
C	Composite bearing, stainless steel shaft

Bore size	
016	16mm
020	20mm
025	25mm
032	32mm
040	40mm
050	50mm
063	63mm
080	80mm
100	100mm

Seals	
S	Nitrile (std)
F	Fluorocarbon (high temp)

Options	
N	None (std)
B	High load bearings ²
A	Bumpers, adjustable stop collars (extend only) and dual tool plate (side ports rec) ^{3, 4}
E	Bumpers and adjustable stop collars (extend only) ³
G	High load bearings, bumpers and adjustable stop collars (extend only) ^{2, 3}
D	Dual tool plate ^{3, 4}
X	Special

Stroke length	
See table below for standard stroke lengths. Consult factory for special stroke lengths.	

Port location / mounting	
D	Dowel holes, top ports (std)
R	Dowel holes, rear ports, top plugged (std)
S	Dowel holes, side ports ¹ and top ports

Port style	
H	NPTF (std)
G	BSPP
P	Flow control, BSPP port, prestolok tube (mm) ¹
F	Flow control, NPTF port, prestolok tube (inch) ¹
B	Flow control, BSPP ¹
N	Flow control, NPTF ¹

Rod lock and stroke type	
Blank	Standard stroke (std hsg), or special stroke (custom hsg)
R	Standard stroke (std hsg) with rod lock
T	Special stroke (std hsg) ⁵
B	Special stroke (std hsg) with rod lock ⁵

Standard strokes (mm)*										
Bore size (mm)	10	25	40	50	75	100	125	150	175	200
16	•	•	•	•	•	•				
20		•	•	•	•	•	•			
25		•		•	•	•	•	•		
32 -100		•		•	•	•	•	•	•	•

* Consult factory for special stroke lengths.

NOTES:

¹ Cannot combine flow controls, side ports and 25mm stroke.

² Not available with rear mounting and ports.

³ Not available with rear port location (R).

⁴ Includes high load bearings as standard.

⁵ Dimensions for special stroke length actuators will be the same as those of the next longest stroke actuator.

Sensors

For sensors see page B339.

B

Guided Cylinders
Actuator Products

P5T
Series

P5L
Series



HB
Series

P5E
Series

Horizontal Load Capacity Standard Unit

P5T Series units will have the same load capacity regardless of orientation. The graphs below show maximum load capacity based on a unit life of 10 million cycles.

EXAMPLE: A P5T-16 with “stroke + d” of 75mm and composite bushings would have a load capacity of 50N.

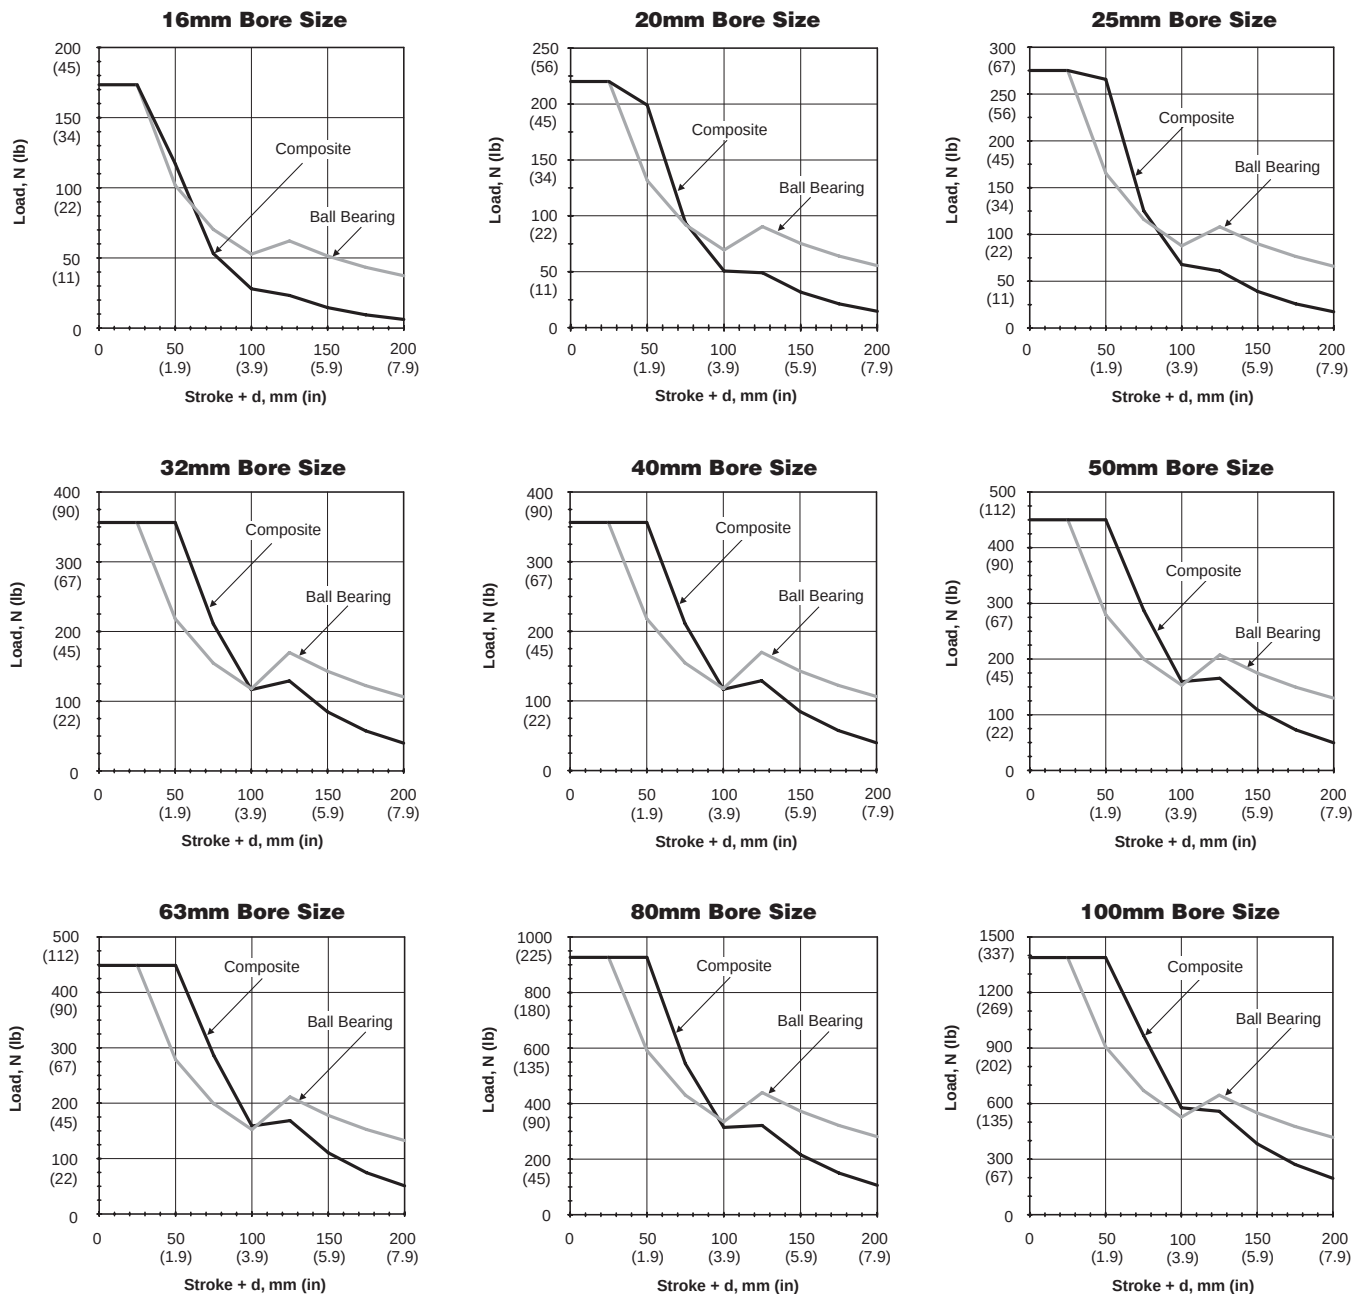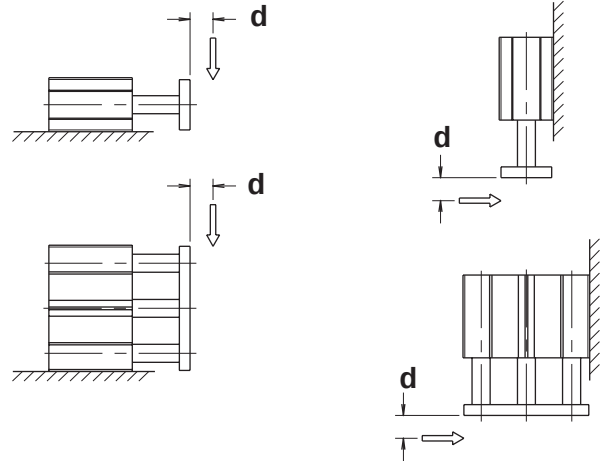


Load Stopping Capacity Standard Unit

P5T Series actuators are ideal for conveyor stopping applications. Units can be mounted horizontally or vertically.


Composite bushings are strongly recommended for this type of application.

EXAMPLE: A P5T-50 unit with a stroke up to 50mm will stop an object moving at 40 cm/second (15.75 in/s) that weighs up to 50 kg (110 lb).


Note: The following graphs are based on 50mm of stroke.

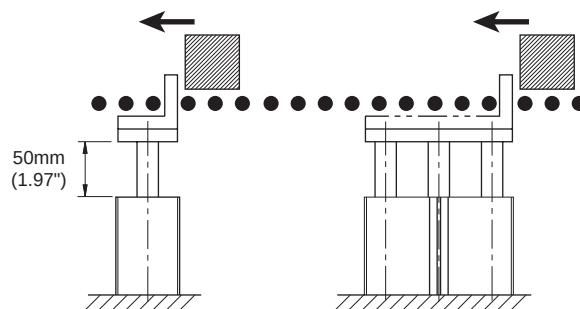


16mm Bore Size

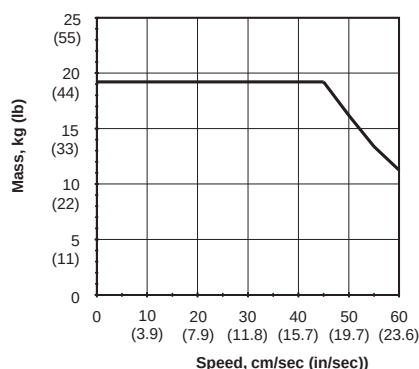


20mm Bore Size

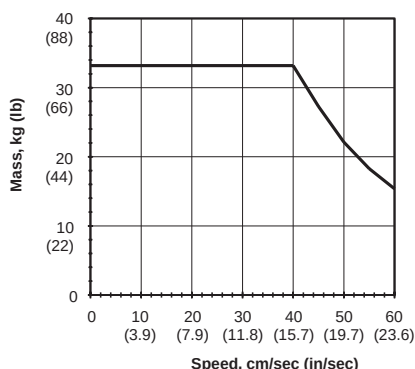


25mm Bore Size

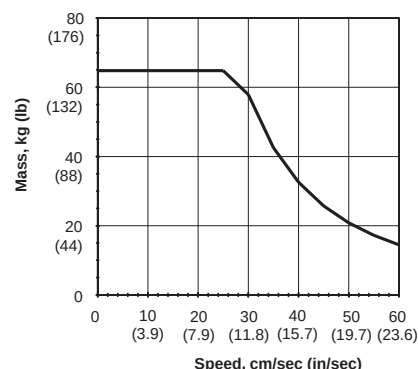


32mm Bore Size

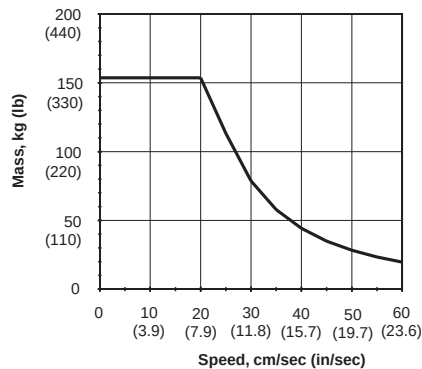


40mm Bore Size

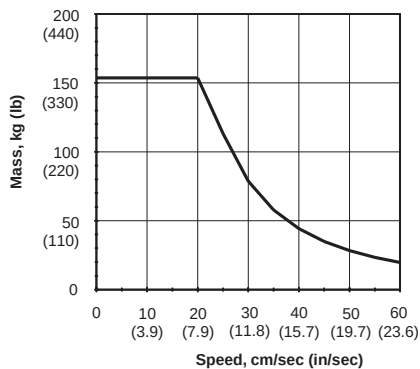


50mm Bore Size

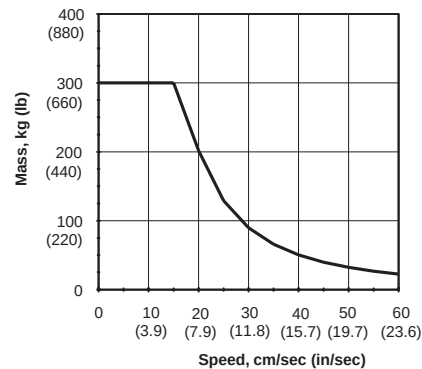


63mm Bore Size

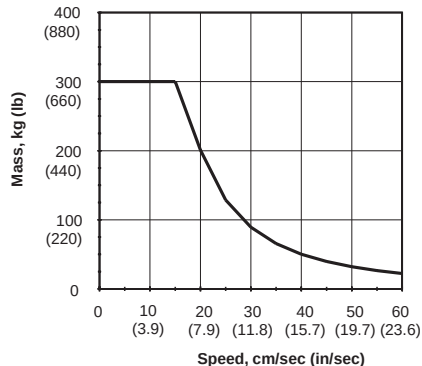

80mm Bore Size

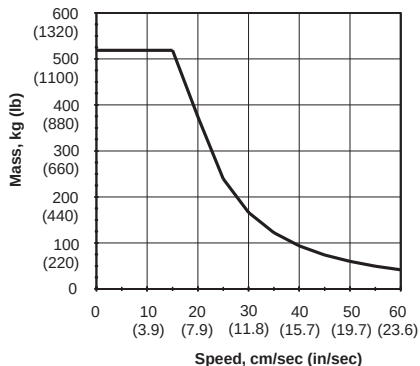











100mm Bore Size

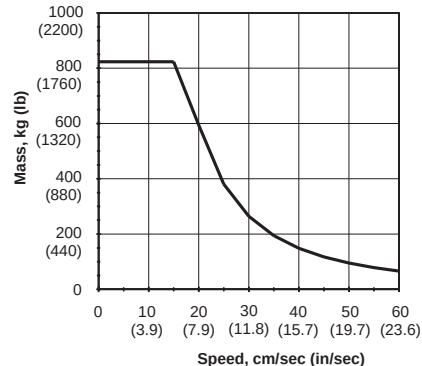

Asymmetrical Torque Capacity Standard Unit

Asymmetrical loading occurs when the load is applied to one side of the unit. P5T Series units can resist torsional loads that are asymmetrical.


EXAMPLE: A mechanism exerts an asymmetrical load of 15Nm on a P5T-50 with 50mm “stroke+d”. The P5T-50 with composite bushings will have adequate torsional capacity.

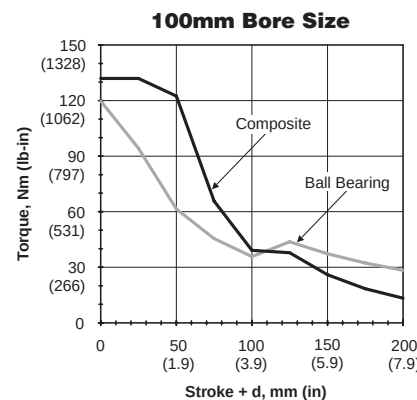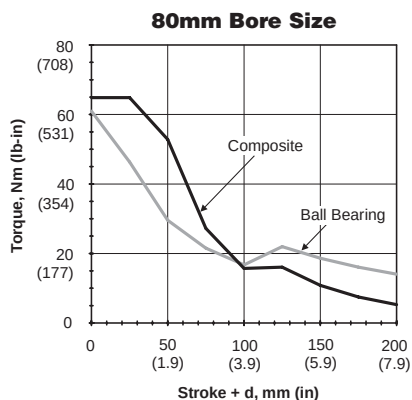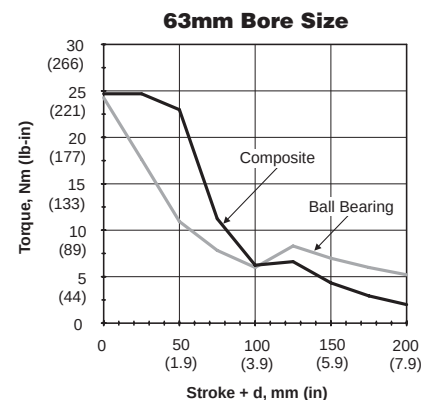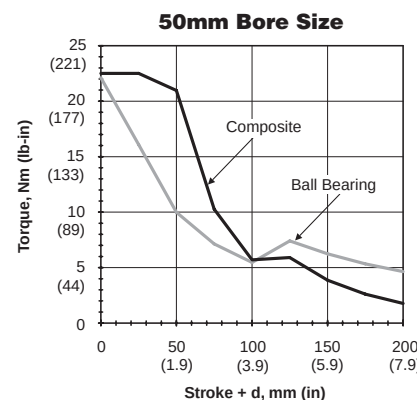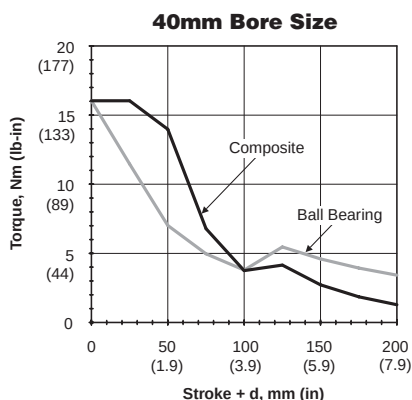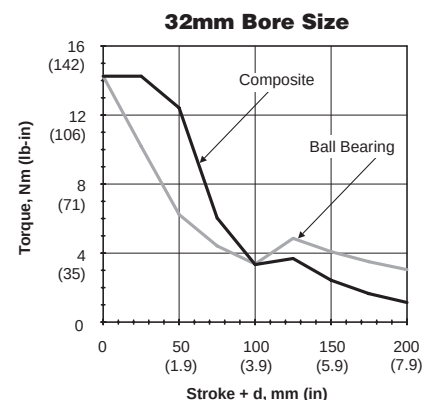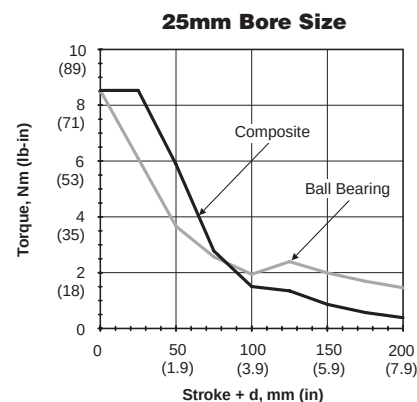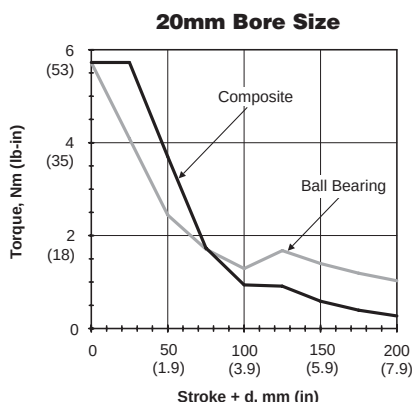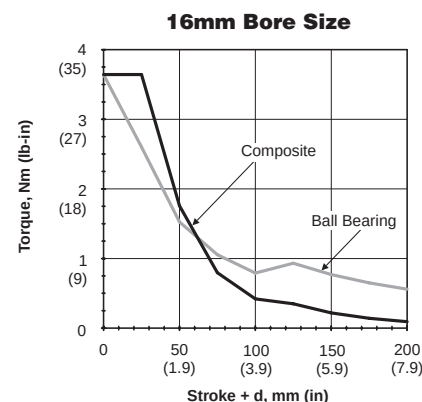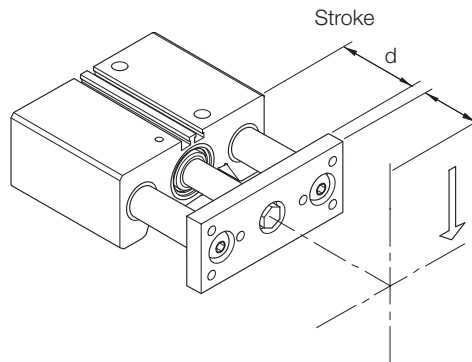










Vertical Eccentric Load Capacity Standard Unit


P5T Series units mounted vertically will have the same eccentric load capacity regardless of orientation. The graphs provide maximum load capacity for an eccentric mounted load. The load is assumed to be mounted at the face of the tooling plate.

These load curves illustrate load ratings based on the bearing system of the product. Load rating is a key selection criterion but is not the only one to consider in the selection of a product.

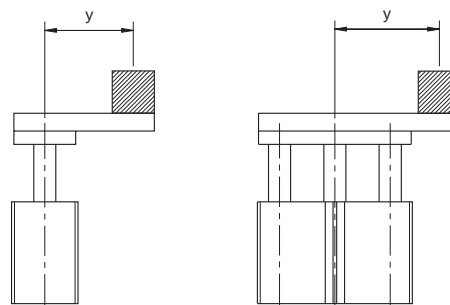

y = eccentricity distance

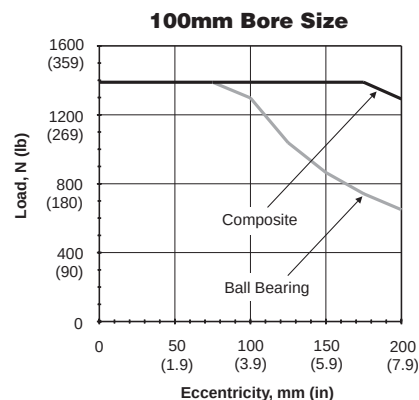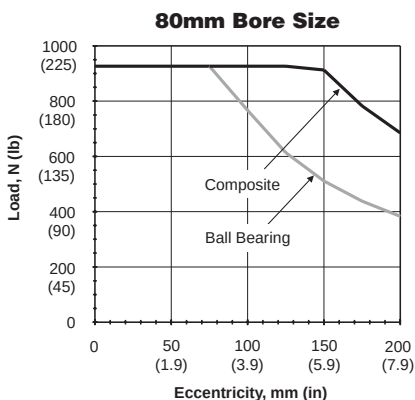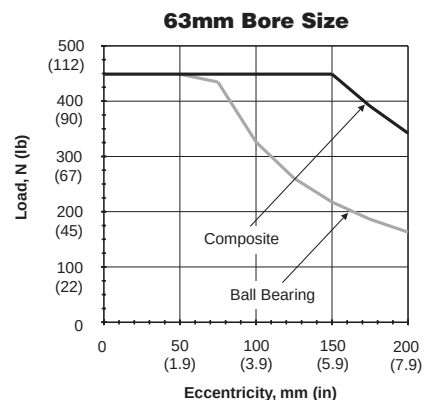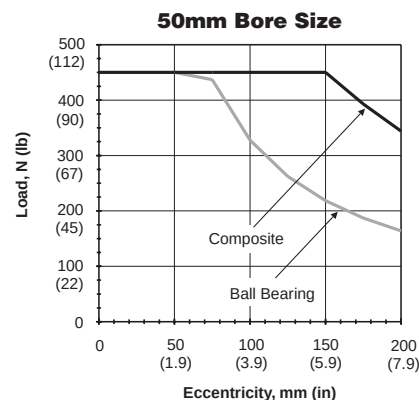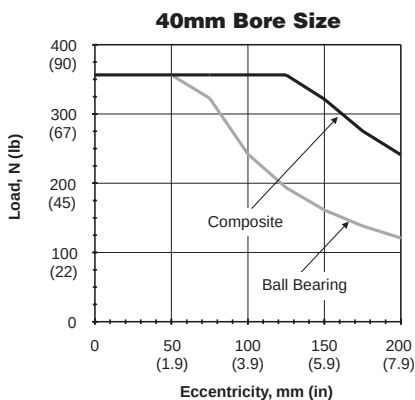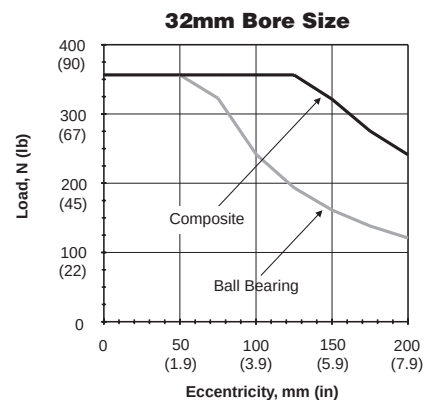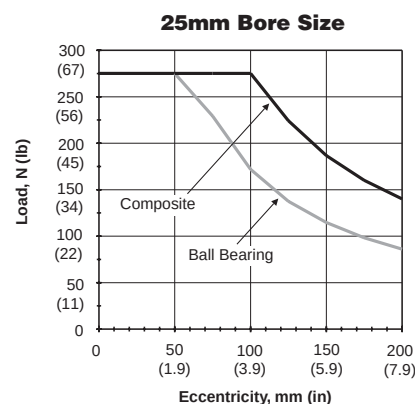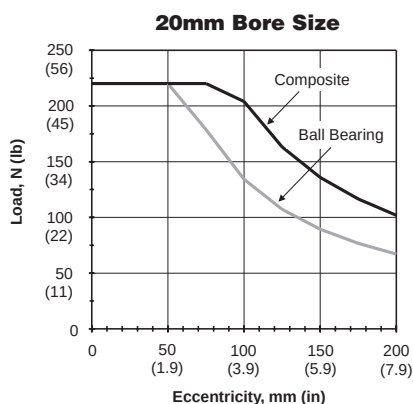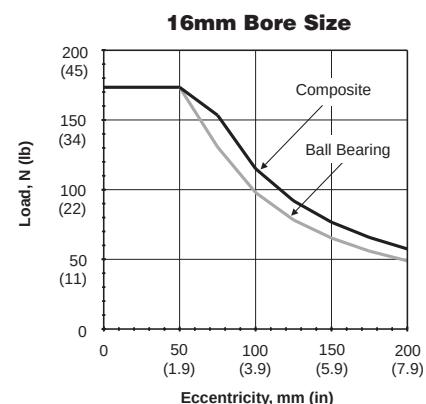

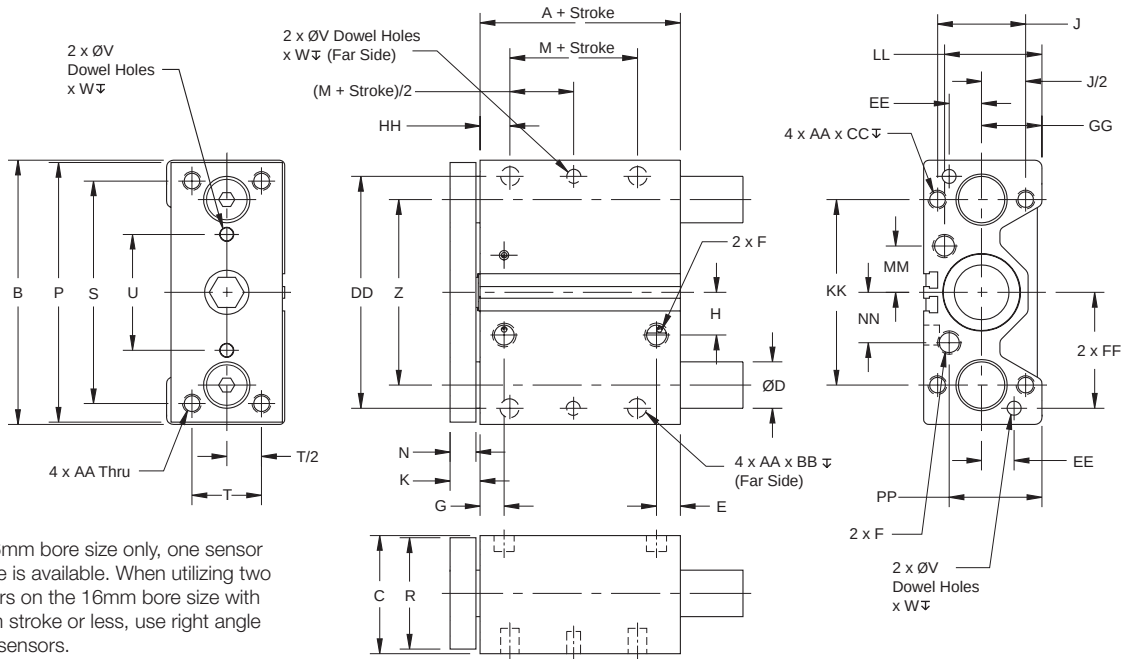

Note: On 16mm bore size only, one sensor groove is available. When utilizing two sensors on the 16mm bore size with 25mm stroke or less, use right angle short sensors.

Dimensions in mm (inch)

Note: Dimensions for special stroke length actuators will be the same as those of the next longest stroke actuator.

Model	A**	B	C	D	D ²	E**	F	G	H	J	K
16	37.75 (1.49)	64 (2.52)	31 (1.22)	8 (0.315)	10 (0.394)	10.1 (0.40)	M5/10-32	10.1 (0.40)	6.95 (0.27)	22 (0.866)	9.94 (0.39)
20	36 (1.42)	74 (2.91)	36 (1.42)	10 (0.394)	12 (0.472)	19 (0.75)	1/8 NPTF or BSPP	10 (0.39)	15.8 (0.62)	26 (1.024)	9.94 (0.39)
25	38 (1.50)	88 (3.46)	42 (1.65)	12 (0.472)	16 (0.630)	21 (0.83)	1/8 NPTF or BSPP	11.4 (0.45)	15.5 (0.61)	32 (1.260)	9.94 (0.39)
32	36 (1.42)	114 (4.49)	51 (2.00)	16 (0.630)	20 (0.787)	10.26 (0.40)	1/8 NPTF or BSPP	10.35 (0.41)	18.42 (0.73)	38 (1.496)	13.1 (0.52)
40	44 (1.73)	124 (4.88)	52 (2.05)	16 (0.630)	20 (0.787)	12.10 (0.48)	1/8 NPTF or BSPP	14.9 (0.59)	22.53 (0.89)	38 (1.496)	13.1 (0.52)
50	44.9 (1.77)	140 (5.51)	62 (2.44)	20 (0.787)	25 (0.984)	14.5 (0.57)	1/4 NPTF or BSPP	16.1 (0.63)	27 (1.06)	44 (1.732)	14.7 (0.58)
63	50.05 (1.97)	150 (5.91)	75 (2.95)	20 (0.787)	25 (0.984)	16.4 (0.65)	1/4 NPTF or BSPP	14.5 (0.57)	33 (1.30)	44 (1.732)	14.7 (0.58)
80	60.3 (2.37)	188 (7.40)	95 (3.74)	25 (0.984)	30 (1.181)	17.5 (0.610)	3/8 NPTF or BSPP	19 (0.75)	37 (1.46)	56 (2.205)	18 (0.71)
100**	67.5 (2.60)	224 (8.82)	115 (4.53)	30 (1.181)	35 (1.38)	21.9 (0.862)	3/8 NPTF or BSPP	23 (0.91)	40 (1.57)	62 (2.441)	18 (0.71)

Model	M	N	P	R	S	T	U	V	W	Z	AA	BB
16	7 (0.276)	7.94 (0.31)	62 (2.44)	25.4 (1.00)	52 (2.047)	16 (.630)	20 (0.787)	3 (0.118)	6 (0.236)	42 (1.654)	M5x0.8	7.5 (0.30)
20	10 (0.394)	7.94 (0.31)	72 (2.83)	31.8 (1.25)	60 (2.362)	18 (.709)	30 (1.181)	4 (0.157)	6 (0.236)	52 (2.047)	M5x0.8	7.5 (0.30)
25	10 (0.394)	7.94 (0.31)	86 (3.39)	38 (1.50)	70 (2.756)	26 (1.024)	34 (1.339)	4 (0.157)	6 (0.236)	62 (2.441)	M6x1.0	9 (0.35)
32	5 (0.197)	11.1 (0.44)	112 (4.41)	44.5 (1.75)	96 (3.780)	30 (1.181)	50 (1.969)	6 (0.236)	6 (0.236)	80 (3.150)	M8x1.25	11 (0.43)
40	10 (0.394)	11.1 (0.44)	122 (4.80)	44.5 (1.75)	106 (4.173)	30 (1.181)	60 (2.362)	6 (0.236)	6 (0.236)	90 (3.543)	M8x1.25	11 (0.43)
50	10 (0.394)	12.7 (0.50)	138 (5.43)	57.2 (2.25)	120 (4.724)	40 (1.575)	60 (2.362)	8 (0.315)	8 (0.315)	100 (3.937)	M10x1.5	12 (0.47)
63	10 (0.394)	12.7 (0.50)	148 (5.83)	69.9 (2.75)	130 (5.118)	50 (1.969)	72 (2.835)	8 (0.315)	8 (0.315)	110 (4.331)	M10x1.5	15 (0.59)
80	15 (0.591)	16 (0.63)	185 (7.28)	89 (3.50)	160 (6.299)	60 (2.362)	92 (3.622)	10 (0.394)	10 (0.394)	140 (5.512)	M12x1.75	18 (0.71)
100	15 (0.591)	16 (0.63)	221 (8.70)	108 (4.25)	190 (7.480)	80 (3.150)	114 (4.488)	10 (0.394)	10 (0.394)	170 (6.693)	M14x2.0	21 (0.83)

Model	CC	DD	EE	FF	GG	HH	KK	LL	MM	NN	PP	Piston Rod
16	10 (0.39)	54 (2.126)	8 (0.315)	27 (1.063)	15 (0.591)	13.06 (0.514)	42 (1.654)	22.5 (0.88)	11.25 (0.44)	9.7 (0.38)	23.0 (0.91)	8 (0.315)
20	10 (0.39)	64 (2.520)	10 (0.394)	32 (1.260)	17 (0.669)	13.06 (0.514)	52 (2.126)	26.0 (1.02)	15.4 (0.61)	15.4 (0.61)	26.0 (1.0)	10 (0.394)
25	12 (0.47)	76 (2.992)	11 (0.433)	38 (1.496)	21 (0.827)	14.06 (0.553)	62 (2.441)	33.4 (1.31)	17 (0.67)	17 (0.67)	33.4 (1.31)	10 (0.394)
32	16 (0.63)	100 (3.937)	14 (0.551)	50 (1.969)	26 (1.024)	12.9 (0.508)	80 (3.150)	42 (1.65)	20 (0.79)	21.7 (0.85)	38 (1.50)	16 (0.630)
40	16 (0.63)	110 (4.33)	14 (0.551)	55 (2.165)	26 (1.024)	13.9 (0.547)	90 (3.543)	41 (1.61)	24 (0.95)	26.4 (1.04)	37.9 (1.49)	16 (0.630)
50	20 (0.79)	124 (4.882)	16 (0.630)	62 (2.441)	30 (1.181)	14.3 (0.563)	100 (3.937)	51 (2.01)	29 (1.14)	33 (1.30)	44 (1.73)	20 (0.787)
63	20 (0.79)	132 (5.197)	18 (0.709)	66 (2.598)	36.5 (1.437)	16.3 (0.642)	110 (4.331)	62 (2.44)	36 (1.42)	37.75 (1.49)	57.75 (2.27)	20 (0.787)
80	24 (0.94)	166 (6.535)	22 (0.866)	83 (3.268)	46.5 (1.831)	21 (0.83)	140 (5.512)	78 (3.07)	45 (1.77)	48 (1.89)	75.5 (2.97)	25 (0.984)
100	28 (1.10)	200 (7.874)	24 (0.945)	100 (3.937)	56.5 (2.224)	25 (0.98)	170 (6.693)	91.5 (3.60)	53 (2.09)	51 (2.01)	95.5 (3.76)	25 (0.984)

D¹ With linear ball bearing

D² With composite bushing

** For Model 100 with 25mm stroke, A = 100.3 (3.95") and E = 28 (1.10")


Contaminant & Weld Flash Covers

A contaminant cover protects the guide rods and bearings from particles and fluid that could cause premature failure.

A weld flash cover protects guide rods and bearings from weld spatter.

Cover option can be ordered on models having the bearings both ends option.

Consult factory to order.

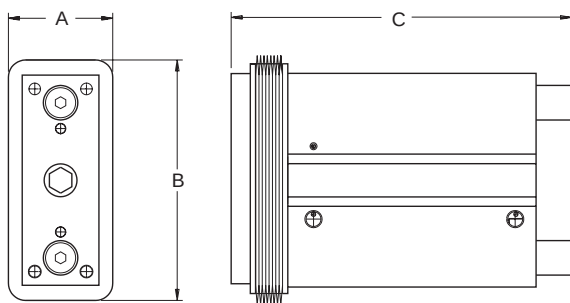

Weld Flash Cover Specifications

Coating material (exposed side)	PVC (Black)
Base material	Nomex
Coating material (other side)	PVC (Black)
Material thickness range	.012" - .016" (.3-.4mm)
Temperature resistance (nomex)	
Briefly	642°F (450°C)
Continuously	-22° to 572°F (-30° to 300°C)
Temperature resistance (coating)	
Briefly	392°F (200°C)
Continuously	-22° to 302°F (-30° to 150°C)
Resistant to	Chemicals, coolants, solvents, oil
Characteristics	self-extinguishing, abrasion resistant
Material weight	400 grams/square meter

Dimensions in mm (inch)

Model	A	B	Standard stroke									
			10	25	40	50	75	100	125	150	175	200
16	42 (1.65)	86 (3.39)	61.2 (2.41)	100.2 (3.94)	135.2 (5.32)	135.2 (5.32)	160.2 (6.31)	200.2 (7.88)	-	-	-	-
20	45 (1.77)	98 (3.86)	-	106.9 (4.21)	141.9 (5.59)	141.9 (5.59)	166.9 (6.57)	216.9 (8.54)	241.9 (9.52)	-	-	-
25	49 (1.93)	112 (4.41)	-	119.9 (4.72)	-	144.9 (5.70)	169.9 (6.69)	194.9 (7.67)	241.9 (9.52)	266.9 (10.51)	-	-
32	62 (2.44)	142 (5.59)	-	127.9 (5.04)	-	152.9 (6.02)	177.9 (7.00)	202.9 (7.99)	266 (10.47)	291 (11.46)	316 (12.44)	341 (13.43)
40	62 (2.44)	152 (5.98)	-	127.9 (5.04)	-	152.9 (6.02)	177.9 (7.00)	202.9 (7.99)	266 (10.47)	291 (11.46)	316 (12.44)	341 (13.43)
50	66 (2.60)	167 (6.57)	-	134 (5.28)	-	159 (6.26)	184 (7.24)	209 (8.23)	274.1 (10.79)	299.1 (11.78)	324.1 (12.76)	349.1 (13.74)
63	77 (3.03)	187 (7.36)	-	134 (5.28)	-	159 (6.26)	184 (7.24)	209 (8.23)	274.1 (10.79)	299.1 (11.78)	324.1 (12.76)	349.1 (13.74)
80	104 (4.09)	244 (9.61)	-	151.8 (5.98)	-	176.8 (6.96)	201.8 (7.94)	226.8 (8.93)	290 (11.42)	315 (12.40)	340 (13.39)	365 (14.37)
100	109 (4.29)	279 (10.98)	-	170.3 (6.70)	-	195.3 (7.69)	220.3 (8.67)	245.3 (9.66)	308.4 (12.14)	333.4 (13.13)	358.4 (14.11)	383.4 (15.09)

Seal Kits

Bore size	Seal kit part number	
	Nitrile seals	Fluorocarbon seals
16	PSK-P5T16	PSK-P5T16-F
20	PSK-P5T20	PSK-P5T20-F
25	PSK-P5T25	PSK-P5T25-F
32	PSK-P5T32	PSK-P5T32-F
40	PSK-P5T40	PSK-P5T40-F
50	PSK-P5T50	PSK-P5T50-F
63	PSK-P5T63	PSK-P5T63-F
80	PSK-P5T80	PSK-P5T80-F
100	PSK-P5T100	PSK-P5T100-F

P5T Rodlock Dimensions

Bore	RA	RB	RC	RD	RE	K
32	58 (2.28)	112 (4.41)	6 (0.24)	10 (0.39)	49.50 (1.95)	2 (0.08)
40	58 (2.28)	122 (4.80)	6 (0.24)	10 (0.39)	49.50 (1.95)	2 (0.08)
50	66 (2.60)	138 (5.43)	10 (0.39)	13 (0.51)	59.30 (2.33)	2 (0.08)
63	83 (3.27)	148 (5.83)	7 (0.28)	18 (0.71)	69.90 (2.75)	2 (0.08)
80	100 (3.94)	185 (7.28)	10 (0.39)	26 (1.02)	90.70 (3.57)	2 (0.08)
100	116 (4.57)	221 (8.70)	10 (0.39)	43 (1.69)	108.00 (4.25)	2 (0.08)

Dimensions in mm (inch)

